



Jan H. Gardner
County Executive

FREDERICK COUNTY GOVERNMENT

DIVISION OF FINANCE
Department of Procurement & Contracting

Lori L. Depies, CPA, Division Director
Diane Fouche, CPPB, Director

June 30, 2015

IFB 15-232-CP

Landfill Scale House Concrete Apron Replacement
Addendum No. 1


This addendum contains revisions, clarifications, and information pertinent to the bid documents of the referenced project and shall supplement, amend, and become part of the procurement documents for the title project and contract. All bids shall be based on this Addendum, in accordance with the bid documents.

This Addendum consists of this sheet, responses to bidder questions, clarifications and attendance sheets for the Pre Proposal Conference.

Acknowledgment of this addendum shall be made on the Proposal, including addendum number and date. Failure to acknowledge addendum may subject the bidder to disqualification.

Bids will be received until 2:00 PM local time, July 16, 2015.

Except as noted herein, all terms and conditions of the document referenced, as heretofore changed, remain unchanged and in full force and effect.



Tim Kepp, Project Manager

PRE-PROPOSAL CONFERENCE NOTES

All questions are due by the end of business day, July 7, 2015.

This is the third Frederick County project using EJCDC C-700 Standard General Conditions, 2013 edition and EJCDC C-800 Supplementary, 2013 edition. Bidder should read these documents prior to submitting a bid.

BIDDER QUESTIONS

Question 1: Could the contract timing be extended to 75 days?

Response 1: The contract will be extended from 60 days to 90 days. The requirement that no scale is shut down for longer than 14 days (Special Provisions Section F) will remain.

Question 2: What finish should be used for the concrete?

Response 2: The finish should match what's in the field. Standard broom finish.

Question 3: What is the direction for concrete section at tie-in at scale pad where asphalt is greater than 9'?

Response 3: A reinforced turn down section should be constructed in this area. Please see attached Sketch SK-1 for detail.

Question 4: Should a speed hump be installed on RFID lane?

Response 4: Yes, a speed hump should be installed to match the one that is currently in the field. Please see attached Sketch SK-2 for detail. Cost of the speed hump shall be included in the cost of Bid Item 2, Install 9" Concrete and Rebar.

Question 5: Could traffic be temporarily rerouted to the opposite scale?

Response 5: No.

Question 6: Are there any utilities in this area?

Response 6: Yes, there is a known sewer connection to the Scale House in this area. It will be marked prior to construction (along with any other utilities in response to your Miss Utility Call).

Question 7: Can demolished material be wasted on site?

Response 7: Yes. All material shall be broken up to the extent possible and can be trucked to another location on site for disposal at no charge. Excess soil can also be disposed of on site at no charge. This will need to be coordinated directly with Landfill Staff.

CLARIFICATION

1. DELETE Proposal Form page 22 in its entirety and REPLACE with the attached page 22.
2. DELETE Special Provisions pages 38 and 39 in their entirety and REPLACE with the attached pages 38 and 39.
3. DELETE pages 21 in its entirety and REPLACE with the attached page 21. Changed contract duration from 60 to 90 calendar days.
4. DELETE pages 32 in its entirety and REPLACE with the attached page 32. Changed contract duration from 60 to 90 calendar days.

Bidder hereby agrees to commence work under this Contract within ten days after service of a written "Notice to Proceed" from the Owner and to complete the work fully within 90 calendar days from Notice to Proceed. It is the intent of the County to assess liquidated damages in accordance with Article 15 of the General Conditions for each calendar day the Contractor is delinquent in completing the Work in the Contract.

Bidder acknowledges receipt of the following addenda:

1. _____
2. _____
3. _____
4. _____
5. _____
6. _____
7. _____
8. _____
9. _____
10. _____

Having carefully examined the Specifications and Special Provisions for the work hereinbefore named, and in conformity with the Specifications, I/We hereby certify that I/we am/are the only person or persons interested in this proposal as principals, that it is made without collusion with any person, firm or corporation; that an opportunity for examination has been made of the Specifications and the Contract Documents, including the Special Provisions contained herein, and of the site of the work, and propose to furnish all necessary machinery, plant, equipment, tools, labor and other means of construction, and furnish all materials specified, in the manner and at the times prescribed, and perform all work as follows:

Issued w/Addendum No. 1

Landfill Scale House Concrete Apron Replacement
Contract No. SW-0801
IFB No. 15-232-CP

Landfill Scale House
Concrete Apron Replacement
Contract No. SW-0801

PROPOSAL FORM

Date: _____

Bidder: _____

Signature: _____

Business Address: _____

Phone: _____

Item No.	Quantity	Description	Unit	Unit Cost	Total Cost
1	224	Install 6" Underdrain, Stone, & Geotextile	L.F.	\$	\$
2	596	Install 9" Concrete, Rebar and 315ST Geotextile	S.Y.	\$	\$
3	596	Install 12" CR6 Stone	S.Y.	\$	\$
4	67	Install Variable Width Median w/Geotextile	S.Y.	\$	\$
5	412	Class 1 Excavation	C.Y.	\$	\$
6	1	All other work required to complete scope	L.S.	\$	\$
7	1	As-Built Drawing	L.S.	\$1,000.00	\$1,000.00
				Total	\$

Deduct Alternate Item

Alt. 1	1	Cost of Labor & Materials Payment AND Performance Bonds	L.S.	\$	\$
--------	---	---	------	----	----

Total Bid for Base Bid Items 1 thru 7: \$ _____
(Written in Figures)

(Written in Words)

We shall complete the Work within 90 calendar days from Notice to Proceed.

IT IS THE INTENT OF THE COUNTY TO ASSESS LIQUIDATED DAMAGES IN THE AMOUNT OF \$1,000 PER DAY.

Basis of Award

The award of the Contract shall be in accordance with Information to Bidders.

understood and agreed that payment will be made only on the actual quantities of work completed in place measured on the basis defined in the Contract Conditions and Contract Specifications and at the unit prices stated.

Article III. Component Parts of this Contract. This contract consists of the following component parts, all of which are as fully a part of this Contract as if herein set out verbatim or, if not attached, as if hereto attached:

1. Contract Specifications
2. Special Provisions of the Contract
3. Standard Specifications adopted 2014
4. EJCDC General Conditions Section 700
5. EJCDC Supplemental Conditions Section 800
6. MD SHA Standard Specifications for Construction and Materials-Section 520
7. Invitation to Bid
8. Information to Bidders
9. Advertisement for Bid
10. Contractor's Proposal
11. This Instrument
12. Subcontractor's Listing
13. Bidder Certification of Work Capacity
14. Affidavit of Qualifications to Bid
15. Contractor's Performance, Labor and Material Payment Bond
16. Policies
17. Performance Bond
18. Contract Drawings

This Contract is intended to conform in all respects to applicable statutes of the State or County in which the work is to be constructed, and if any part or provision of this Contract conflicts therewith, said statute shall govern.

Article IV. Starting and Completion. The Contractor agrees to commence work under this Contract on a date to be specified in a written order from the Owner, and to fully complete all work included in the Contract to the point of conditional acceptance by the Owner within 90 calendar days of the said date, and the liquidated damage provisions of this Contract, as determined by Article 15 C700 of the General Conditions, applies to this time period.

Special Provisions

Landfill Scale House Concrete Apron Replacement

- A. Unless specified differently in this section or on the attached drawing, the Frederick County General Conditions and Std. Specs. for Water Mains, Sanitary Sewer and Related Structures will govern design and construction.
- B. Furnish and install all materials needed to complete two adjacent scale aprons as shown on the attached project drawing labeled, "Scale House Drive Upgrade."
- C. A detailed listing of the bid tab items and measurement and payment for those items is as follows:
 1. Install 6" Underdrain, Stone, & Geotextile
 - As indicated in MD SHA Std. Specs. for Construction and Materials section 520 please refer to MD SHA section 306 for details on construction, measurement and payment. Video inspection is not included in this project and should be excluded from the pay items listed in MD SHA section 306.
 2. Install 9" Concrete, Rebar and 315ST Geotextile
 - MD SHA Mix #7 shall be used for concrete pavement material. Concrete plant certification is needed to confirm material delivery meets this MD SHA Mix specification.
 - Reinforcement shall be placed per MD SHA Std. Specs. for Construction and Materials, specifically sections 520.03.06 and 520.03.07.
 - Please refer to MD SHA Std. Specs. for Construction and Materials section 520 for construction, measurement, and payment of this item.
 - The 315ST Geotextile associated with this work is incidental to this item and will not be measured.
 3. Install 12" CR6 Stone
 - Please refer to MD SHA Std. Specs. for Construction and Materials section 501 for construction, measurement, and payment of this item.
 4. Install Variable width Median including Geotextile
 - This line item will be measured by the square yard of finished surface completed in place. Payment will be made for the quantity measured at the unit price per square yard. Payment will be full compensation for excavation, subgrade preparation, geotextile, aggregate, and all incidentals necessary to complete the work.
 5. Class I Excavation
 - This item includes the excavation and removal/disposal of existing apron and median material.
 - This item will be measured and paid per MD SHA Std. Specs. for

Construction and Materials section 201 for Class I Roadway Excavation.

6. All other work required to complete scope

- Includes cost of Labor & Materials Payment and Performance Bonds, Insurance, Mobilization, Demobilization, rentals, and other incidentals not specifically covered by other bid items.


7. As-built Drawing

- Upon completion of work a drawing shall be provided and approved by the inspector that indicates the exact work completed. Any deviations from the plan shall be in red and all items that comply should be checked in red.
- All delivery tickets and testing documentation shall be included with the record drawing submission.

Alt. 1. Deduct Alternate Item – Labor & Materials Payment AND Performance Bonds


- Item Alt. 1 may be selected at the discretion of the Owner prior to Bid Award. This item of work shall consist of the cost to provide the Labor & Material Payment Bond and the Performance Bond as currently required and included under the Base Bid Item 6. If this bid item is selected by the Owner, bonds shall not be required under this contract and the price bid under Item 6, *All other work required to complete scope*, shall be reduced by the amount bid for *Deduct Alternate Item Alt. 1*.

- D. Subgrade and aggregate shall be compacted with a vibratory roller to achieve 97% relative compaction. Geotechnical testing is to be provided by the contractor. Two compaction tests shall be completed for each pad site.
- E. The Contractor shall have 90 calendar days to complete this scope of work.
- F. Although the contract duration is 90 calendar days, the actual time while a "scale" is shut down shall not exceed 14 days. This entails everything from the beginning of demolition to obtaining 75% strength for the concrete specification.
- G. Frederick County DUSWM will give direction on how exactly to set up the maintenance of traffic associated with the project. Please coordinate with Ms. Lori Finafrock, Landfill Asst. Superintendent at (301) 600-7403. Provide one week notice prior to the start of a "scale" shutdown.

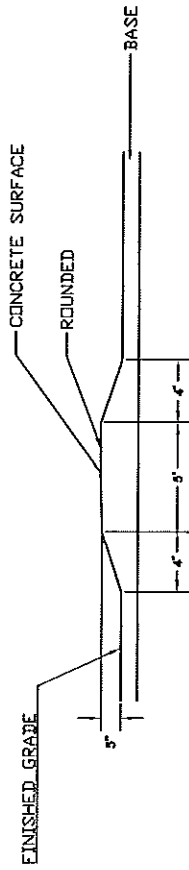

SPEED BUMP PLAN DETAIL

A
2

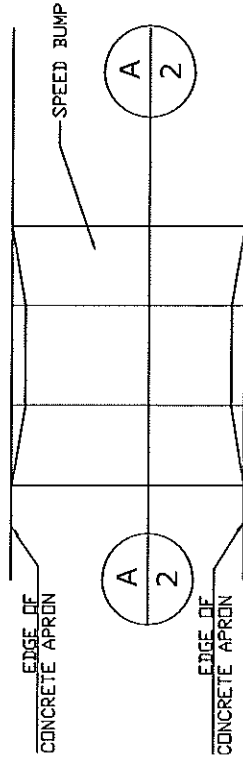

SPEED BUMP PLAN DETAIL

NOTE: PAINT SPEED BUMP SAFETY YELLOW

FREDERICK COUNTY
DIVISION OF UTILITIES & SOLID WASTE MANAGEMENT
DEPARTMENT OF ENGINEERING AND PLANNING


**SPEED HUMP DETAIL
ADDENDUM 1**

CONTRACT No. SW 0801

SKETCH SK-2

DRAWN BY: MLE

SCALE: N.T.S. DATE: JUNE 2015

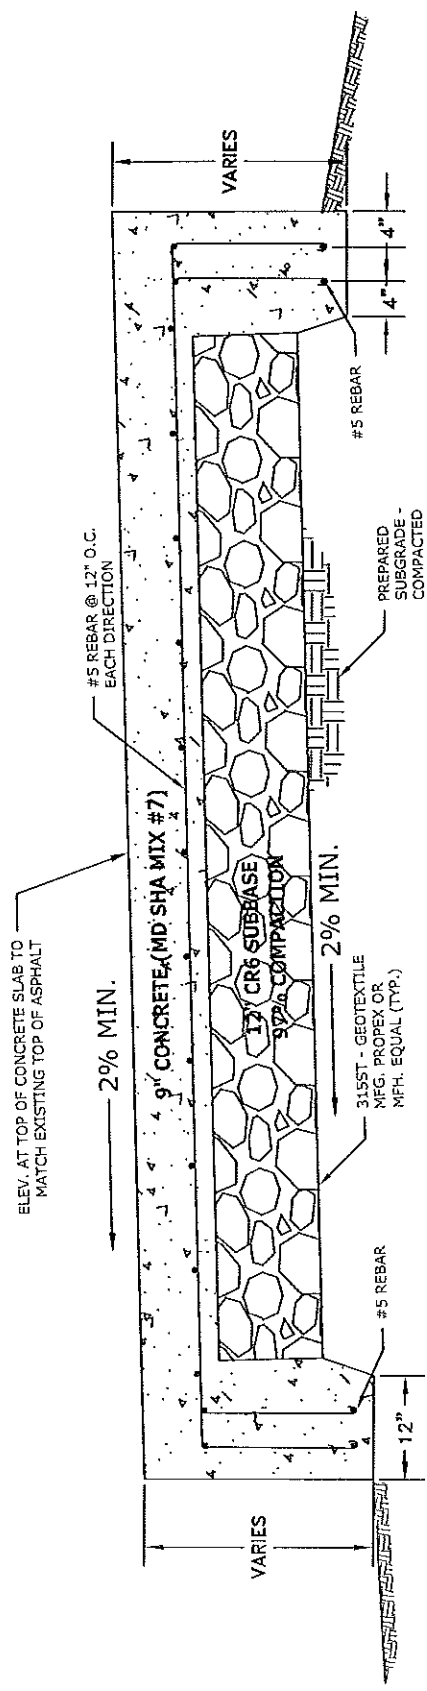

SCALE HOUSE
APRON SECTION
APPROACHING TIE-IN
POINT AT SCALE PAD
N.T.S.

<p>FREDERICK COUNTY DIVISION OF UTILITIES & SOLID WASTE MANAGEMENT DEPARTMENT OF ENGINEERING AND PLANNING</p>	
<p>SCALE HOUSE APRON REPLACEMENT ADDENDUM 1 CONTRACT NO. SW 0801 SKETCH SK-1</p>	
<p>SCALE: N.T.S.</p>	<p>DATE: JUNE 2015</p>

